



Contact support
 Fixed Power : Pole P
 444565 A3

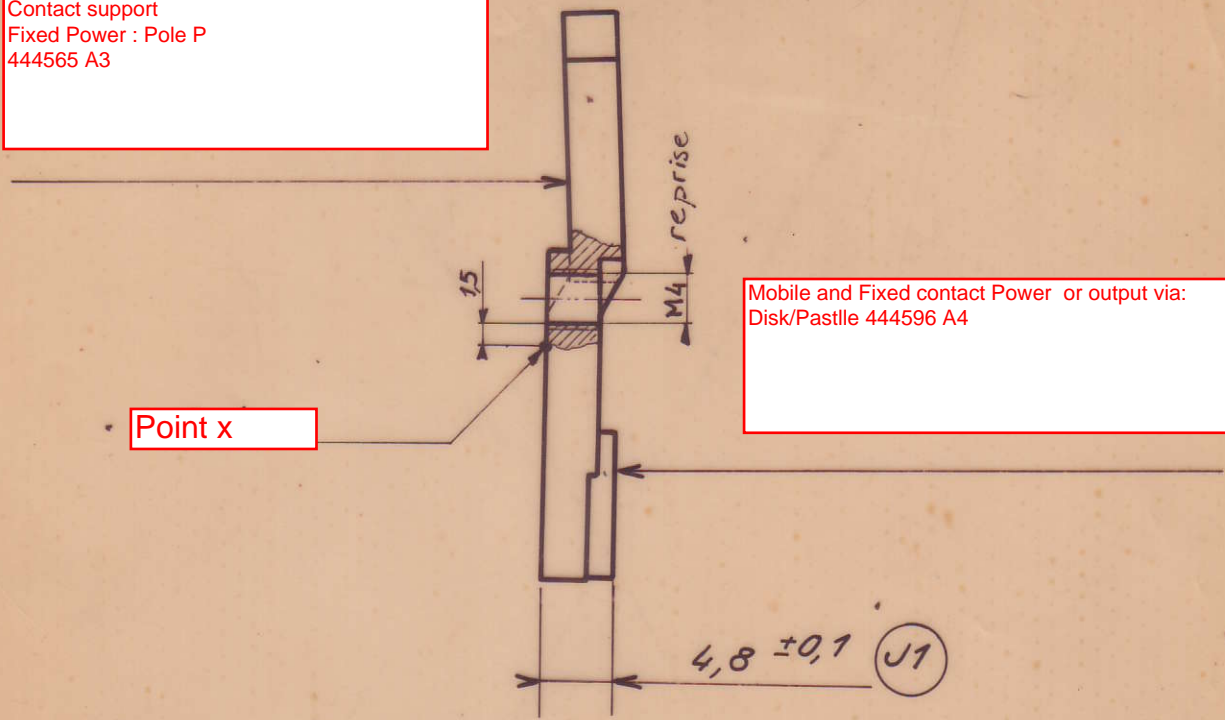

Point x

Mobile and Fixed contact Power or output via:
 Disk/Pastille 444596 A4

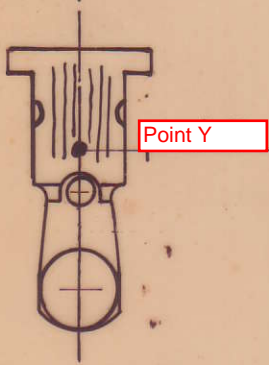

Final Characteristics
 Hardness of the measured support
 at the point X : Mini 60 HV
 at the point Y : Mini 110HV

the mark which shows the toleranced dimensions refer to the functional test. 444566 A1

C	added tapping M4	32813	22.7.85	P.D.
B	70HV-> 60HV	31950	15.5.89	H. leclaire
A	Commence : File : Point X:70HV mini	28187	11.5.82	H. leclaire

Index	Modifications	Note Number	Date	Sender
-------	---------------	-------------	------	--------

Matière :	Masse	Traitement thermique :	Protection de surface :
			Total Silvering 2µ

Invest :	File	contactor: LC1D80 Fixed Contact Power or output: Pole P assembly
2AL02		

Done by	Verified by	Date	Scale	Format	Controls & Switchgear Contactors Ltd.	C-58, PHASE-II NOIDA 201305
PLUMERET		1e 17.7.79	2	A4		

4	4	4	5	9	9	A/B/C
---	---	---	---	---	---	-------

See test instructions